



GJS-6032 Fiber Optical Splice Closure Specifications

Version:1.0



View website

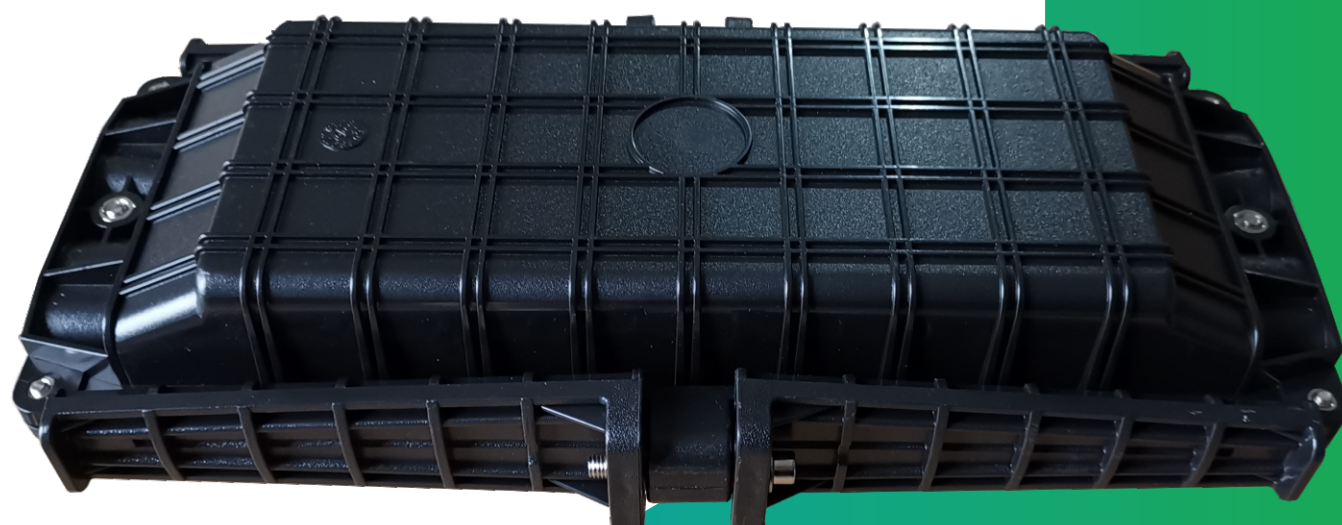

Download CN ver

GJS-6032 type fiber optic splice closure specifications

GJS-6032 type Half-type tape-sealed optical cable splice box adopts an innovative arc-circular half-type split structure design, and the casing is fixed and sealed with multiple screws. Optical cable entry and exit holes are designed with mechanical tape seals. The main function of this product is to provide continuous protection for various types of cables with mid-span + branching and splicing in optical transmission links, and can play the role of mid-span, branching, splitting and wiring. This product is suitable for installation and use in aerial, underground, pole mounting, wall mounting, hand hole, pipeline, etc.



Reliable sealing

The cover and bottom of splice closure are use reliable elastomer sealing components, and the optical cable inlet and outlet holes are mechanically sealed by winding sealing tape, and the protection level is above Ip68.

Modular design

The fusion splicing tray is designed with a fast stacking structure, and the number of fusion splicing trays can be increased or decreased according to the capacity.

Supports coiled storage of fibers with loose tubes, and the bending radius of fibers is greater than 30mm.



Powerful Features

Support optical cable splicing, splitting, distribution, branching, connection, and mid-span storage.




Support grounding by using ground connection wires.

Excellent practicabilit

The cover and bottom of splice closure are made of modified PC+ABS material, and the internal metal parts are made of high-quality steel plate materials. It can have a service life of more than 20 years (depending on the environment) and has good impact resistance and corrosion resistance.



GJS-6032 type fiber optic splice closure specifications

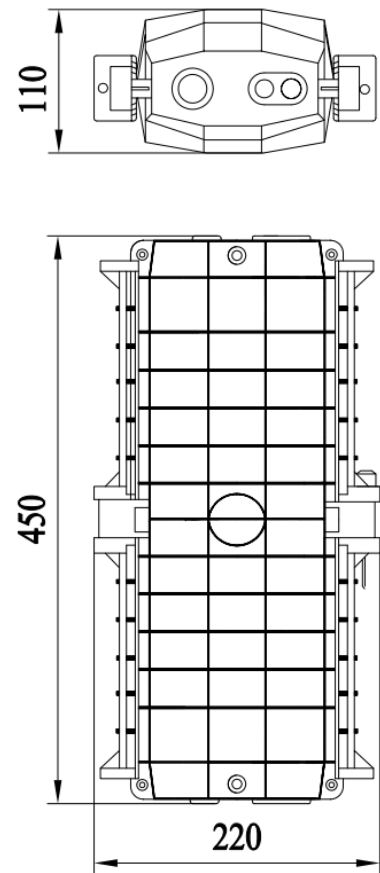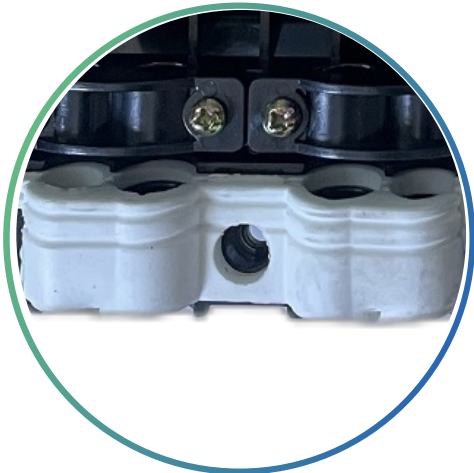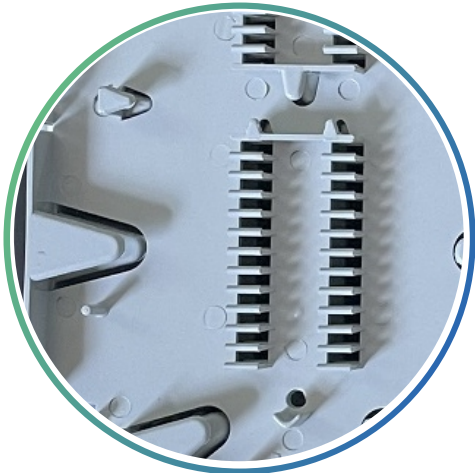

Product specifications	
Maximum capacity	288 cores
Capacity of each splice tray	24-48core/tray
Maximum number of splice trays	max 6pcs
Number of optical cable entrance and exit tubes	8 main cable ports

Ordering Guide


Accessories information



Product number
GJS-6032



Product size
450*220*110mm



Product weight
2.413kg












Qty/CTN
10 set



Inner carton size
475*230*125mm



Outer carton size
660*485*500mm

Standard accessories			
1. M6 Allen key		6.Aerial mounting kit	
2. Heat shrinkable protective sleeve		7.Seal tape	
3.Number paper		8.Special wrench	
4.Nylon tie		9. Combination screw	
5. Installation tape			

To the future together.



www.ztong.com



info@ztong.com



Tel:86-0574-62498928



Ningbo Zhantong Telecom Equipment Co.,Ltd.



Fumin Industrial Zone,Moushan,Yuyao City,Zhejiang,China