

GP-142 Fiber Optic Outlet Specifications

Version:1.0










Download CN ver

GP-142 type fiber optic outlet specifications

The GP-142 Fiber optic outlet can be installed with different types of adapters and is sutable for wall-mounted or wall-mounted fiber-to-home installation. The outlet is easy to install and remove. The front of the fiber optic outlet is equipped with a dust cover. It is dust-free and has no additional insertion loss. It can well protect the fusion splices of optical fibers and drop cables. It is simple, convenient and easy to construct.

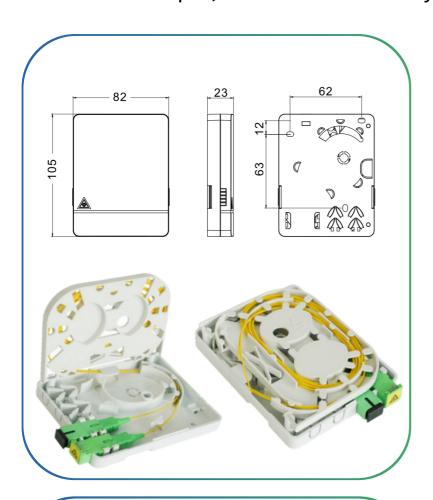

Ordering Guide



Product number GP-142



Product size 105*82*23mm



Product weight 0.09kg



Qty/CTN 200 set



Inner carton size 115*88*27mm



Outer carton size 490*290*465mm



Specifications	
Maximum capacity	2 cores
Max Input(mm)	2*3-Ф7
Max Adapter(PCS)	2
Tensile strength	>50N

Features

It is used for different kinds of modules and applied to the working area subsystem.

It uses embedded surface frame, easy to install and disassemble, it is with protective door and dusty free, can do OEM for any customers and print requested LOGO.

With application of fiber SC/LC simplex, duplex and other different environment installed plate or flush plate. All modules can be configured on customer's choice.

All modules are free of welding. Material: PC+ABS.

Product application

The telecommunication network, metropolitan area network, optical fiber communication system.

Optical testing equipment/instrument.

CATV optical fiber, optical fiber sensor.

Optical fiber broadband access network,FTTH optical fiber.

Optical fiber distribution frame, frame type and wall type optical fiber distribution unit.

Accessories information	
1.Wall mounted kit	Summing Summings
2.Heat shrinkable protective sleeve	

To the future together.



www.ztong.com



info@ztong.com



Tel:86-0574-62498928



Ningbo Zhantong Telecom Equipment Co.,Ltd.



Fumin Industrial Zone, Moushan, Yuyao City, Zhejiang, China