

GP-X

Fiber Optic Outlet Specifications

Version:1.0




View website



Download CN ver

GP-X type fiber optic outlet specifications

GP-X Fiber optic outlet is able to hold up to 1 subscribers. It is used as a termination point for the drop cable to connect with patch cable in FTTH indoor application. It integrates fiber splicing, termination, storage and cable connection in one solid protection box.

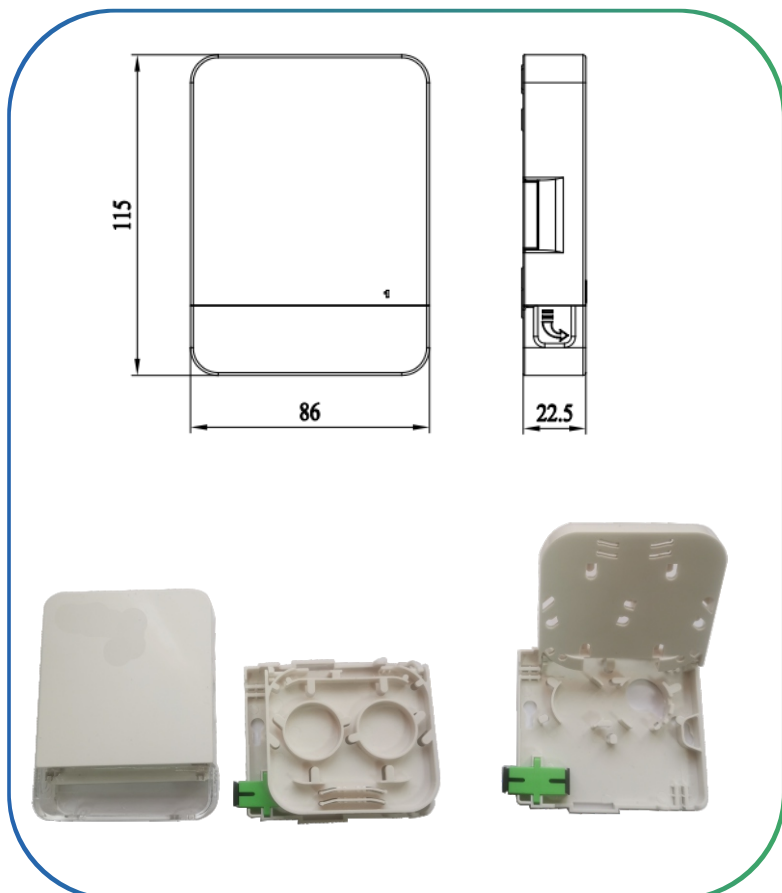

Specifications

Maximum capacity	1 cores
Maximum number of splice trays	max 1 pcs
Max Adapter(PCS)	1
Tensile strength	>50N

Features

It uses embedded surface frame, easy to install and disassemble, it is with protective door and dusty free. Dust-proof design with Ip-20 Protection level. Integrated with splice cassette and cable management rods. Manage fibers in a reasonable fiber radius condition. Easy to maintain and extend the capacity. Suitable for the fusion splice or mechanical splice. Embedded type surface, easy for installation and removal. 2 ports cable entrance for patch cable. Material:PC+ABS.

Product application

It is used for different kinds of modules and applied to the working area subsystem.

Accessories information

1.Wall mounted kit	
2.Heat shrinkable protective sleeve	
3.Nylon tie	

Ordering Guide



Product number
GP-X



Product size
115*86*22.5mm



Product weight
0.09kg



Qty/CTN
200 set



Inner carton size
/




Outer carton size
490*260*460mm

To the future together.

 www.ztong.com

 info@ztong.com

 Tel:86-0574-62498928

 Ningbo Zhantong Telecom Equipment Co.,Ltd.

 Fumin Industrial Zone,Moushan,Yuyao City,Zhejiang,China