TIESTON

To the future together

GJS-I-2024 Fiber Optical Splice Closure Specifications

Version:1.0

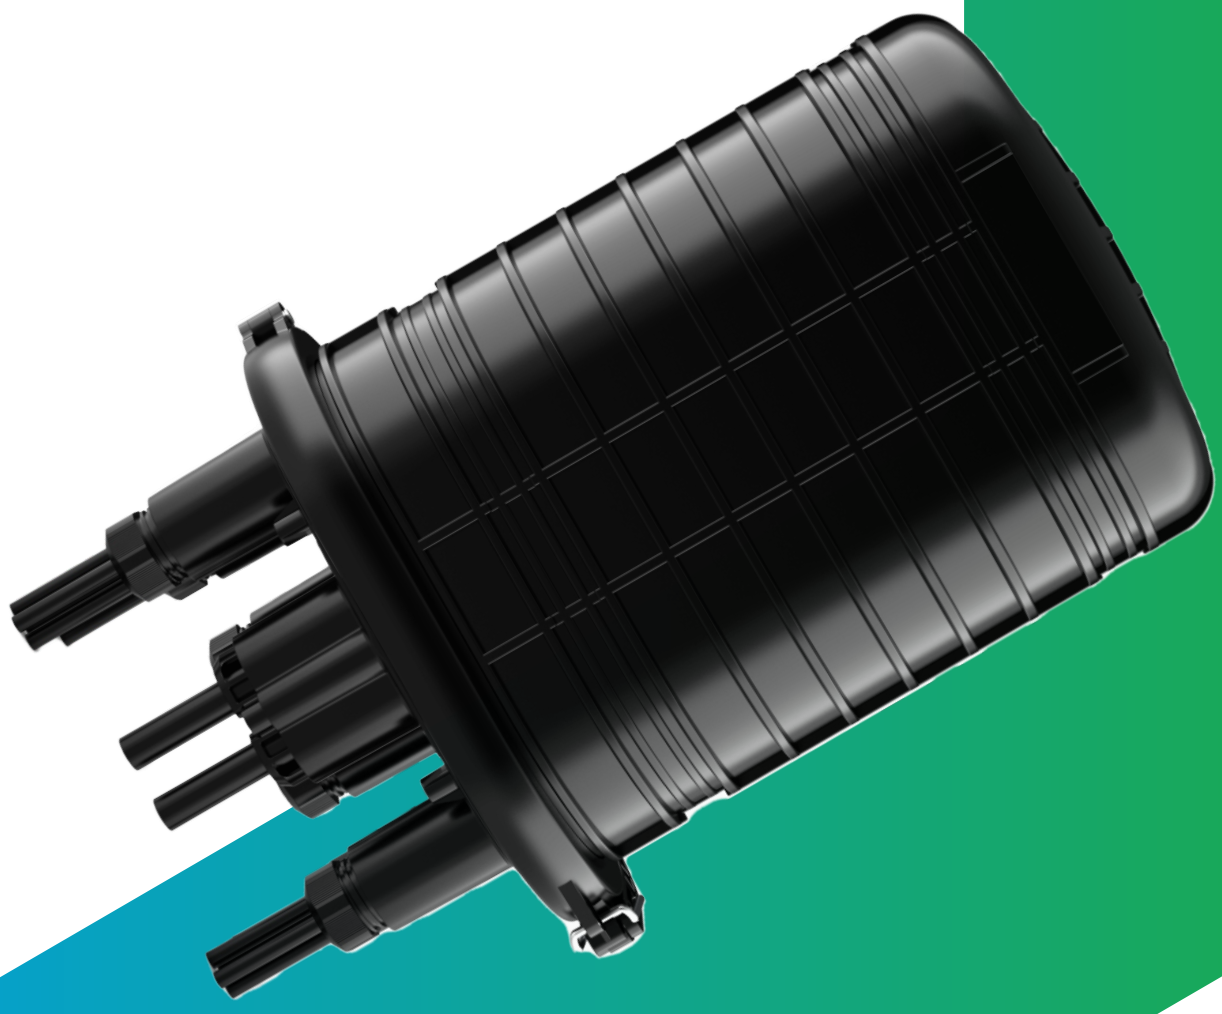

Official website

Technical specification

Installation guide

Download CN ver

GJS-I-2024 type fiber optic splice closure specifications

GJS-I-2024 cap type screw cable connector box adopts the innovative flat circular cap structure design, the box cover and the bottom of the box are locked and sealed with a hoop, and the cable is in and out of the single end. The main function of the product is to provide non-cutting straight-through + splicing and splicing + splicing and branch joint protection for various types of optical cables in the optical transmission link, which can play the role of straight-through, splicing, splitting and wiring. The shell of the product is made of modified PP engineering plastic, which has good physical and chemical properties, and is suitable for overhead, pole, wall hanging, underground and pipeline installation.

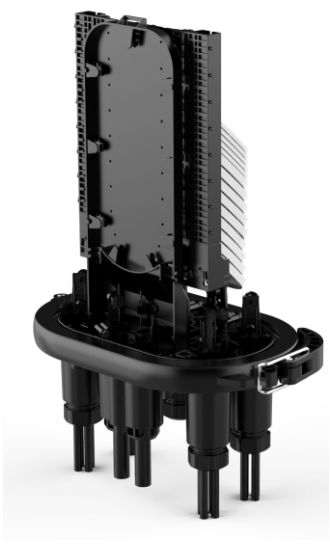

Reliable sealing

The optical cable connector box shell and optical cable inlet and outlet holes are mechanically sealed with reliable shell silicone sealing ring and stainless steel washer, and the protection level is above IP68.The optical cable inlet and outlet hole sealing ring has different specifications of aperture to choose from, which can meet the different diameters of optical cable inlet and outlet sealing, and the sealing performance of the product is better.

Modular design

The welding disc and its fixed bracket adopt modular structure design, which can increase or reduce the number of welding disc and fixed bracket according to the welding capacity, and has a high cost performance.Optical fibers with loose sleeves can be coiled and stored in the storage disk. The bending radius of optical fibers is greater than 30mm.

Powerful Features

Support optical cable welding, splitting, wiring, divergence, docking and through inventory; Can be aerial, wall hanging, pole holding, buried, pipeline installation; The metal parts in the connector box can be grounded through the grounding device and grounding cable.

Excellent practicabilit

The shell of the joint box is made of modified PP material, and the internal metal parts are made of 304 stainless steel material, which can meet the service life of more than 25 years (depending on the environment), and has good impact and corrosion resistance characteristics. If necessary, the fitting box can also be fitted with a valve nozzle for the tightness test of the fitting box.

Ningbo Zhantong Telecom Equipment Co., Ltd.
Fumin Industrial Zone, Moushan, Yuyao City, Zhejiang, China
Tel: +86-(0)574-62495903
Fax: +86-(0)574-62498298

GJS-I-2024 type fiber optic splice closure specifications

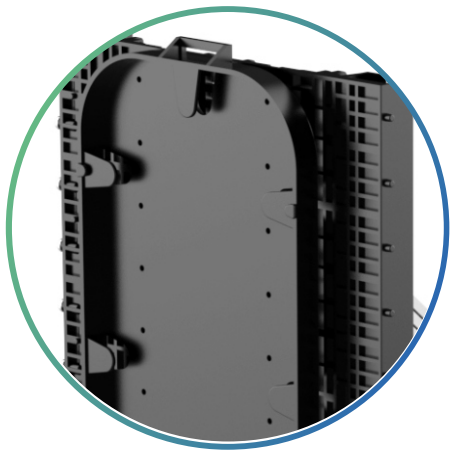

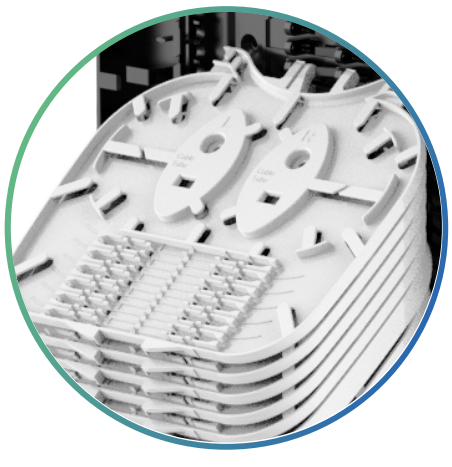

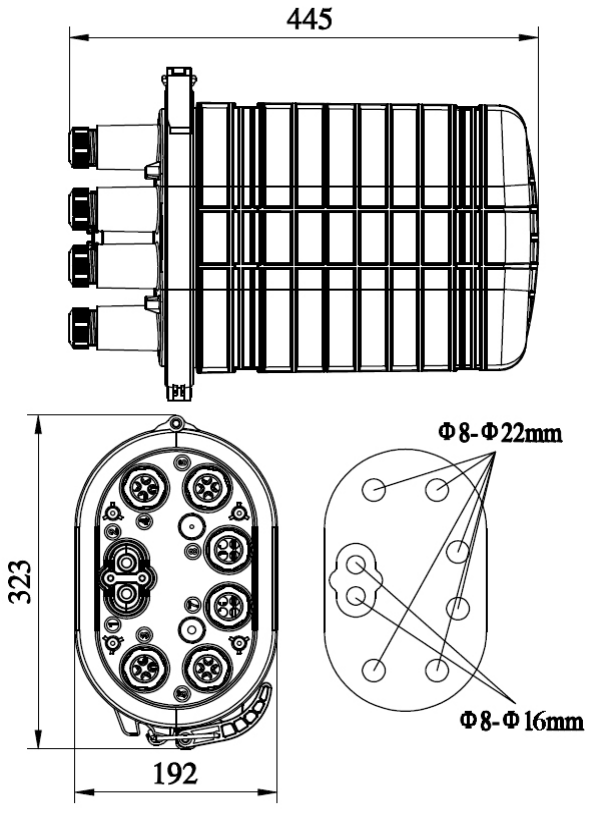

Product specifications	Splicing tray A	Splicing tray B	Splicing tray C
Maximum capacity	192 cores	384cores	160cores
Capacity of each splice tray	6-12 core/tray	6-12 core/tray	5-10 core/tray
Maximum number of splice trays	max16pcs	max 32 pcs	max 16 pcs
Number of optical cable entrance and exit tubes	1 oval port / 6branch ports		

Ordering Guide

Product number
GJS-I-2024

Product size
323*192*445mm

Product weight
5.5kg

Qty/CTN
4 set

Inner carton size
320*210*450mm

Outer carton size
670*440*470mm

Accessories information

Standard accessories			
1.Seal tape		5.Nylon tie	
2. Installation tape		6.Desiccant	
3. Abrasive cloth		7.Special wrench	
4. Heat shrinkable protective sleeve		8.Hose clamp	

Optional accessories			
1. Pressure testing valve		5.Pole mounting	
2. Earthing deriving device		6.Aerial mounting kit	
3. Buffer tube for bunchy fiber		7.Wall mounting kit	
4. Drop cable sealing accessories			

Ningbo Zhantong Telecom Equipment Co., Ltd.
Fumin Industrial Zone, Moushan, Yuyao City, Zhejiang, China
Tel: +86-(0)574-62495903
Fax: +86-(0)574-62498298

To the future together

To the future together.

www.ztong.com

info@ztong.com

Tel:86-0574-62498928

Ningbo Zhantong Telecom Equipment Co.,Ltd.

Fumin Industrial Zone,Moushan,Yuyao City,Zhejiang,China