


GJS-III-6006 Optical Fiber Distribution Box Specifications

Version:1.0



Official website



Technical specification



Installation guide



Download CN ver

GJS-III-6006 type fiber optic distribution box specifications

GJS-III-6006 Hafnium tape sealed optical cable joint box adopts an innovative arc circular flip cover Hafnium structure design, and is fixed and sealed with plastic hinges and a small amount of screws as a whole. The optical cable inlet and outlet holes are designed with nut and tape sealing. The appropriate optical cable inlet and outlet holes are selected according to the diameter of the optical cable. After winding the sealing tape, they are installed in the corresponding inlet and outlet holes to achieve the sealing of the optical cable. The main function of this product is to provide docking, splicing, branching, and branch joint protection for various types of optical cables in the optical transmission link. The shell of this product is made of modified PC engineering plastic, which has good physical and chemical properties and is suitable for overhead and wall mounted installation.



Reliable sealing

The upper and lower shells of the optical cable joint box are sealed with reliable elastic components, and the optical cable inlet and outlet holes are mechanically sealed by winding sealing tape, with a protection level of IP68 or above. The optical cable inlet and outlet holes of the junction box have different specifications of aperture to choose from, which can meet the sealing requirements of optical cables with different diameters. The sealing performance of the product is good

Modular design

The welding disc adopts a fast stacking structure design, which can increase or decrease the number of welding discs according to the capacity. The bottom of the box supports fiber optic coil storage with loose sleeves, and the bending radius of the fiber optic is greater than 30mm

Powerful Features


Support the divergence, docking, and fusion of optical cables. Can be installed overhead or wall mounted. By using grounding devices and grounding wires, support the grounding of metal components inside the junction box.

Excellent practicabilit

The shell is made of modified PC material, and the internal metal parts are made of 304 stainless steel material, which can meet the service life of more than 25 years (depending on the environment), and has good impact resistance and corrosion resistance. If necessary, the box can also be fitted with a valve nozzle for the air tightness test of the box.



GJS-III-6006 type fiber optic distribution box specifications

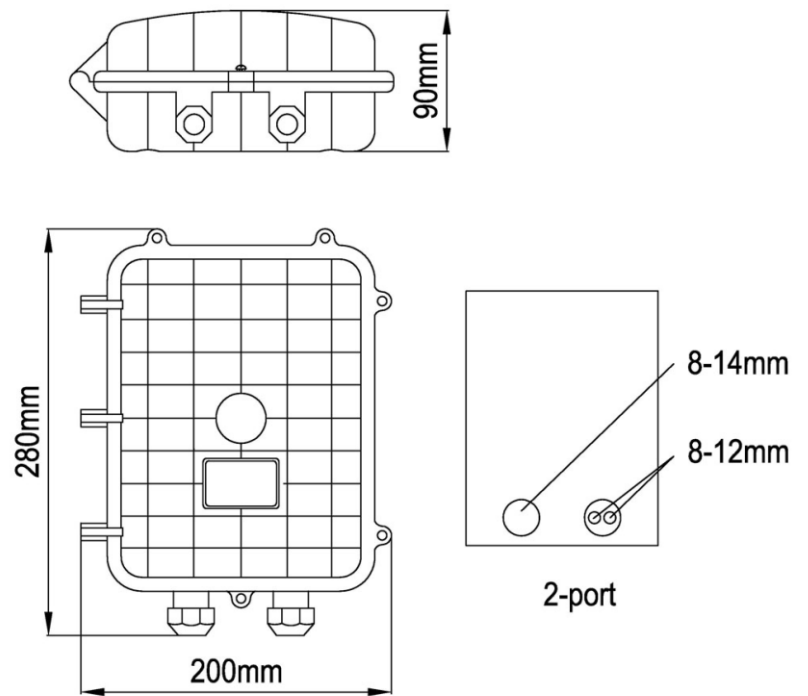

Product specifications	Splicing tray A	Splicing tray B
Maximum capacity	48 cores	96 cores
Capacity of each splice tray	6-12 core/tray	12-24core/tray
Maximum number of splice trays	max 4 pcs	max 4pcs
Number of optical cable entrance and exit tubes	2 main cable ports	

Ordering Guide | Accessories information



Product number
GJS-III-6006



Product size
280*200*90mm



Product weight
1.5kg



Qty/CTN
12 set



Inner carton size
290*205*107mm



Outer carton size
640*305*465mm

Standard accessories

1.Labeling paper		6.Special wrench	
2. Installation tape		7.Earthing wire	
3.Abrasive cloth		8.Seal tape	
4. Heat shrinkable protective sleeve		9.Desiccant	
5.Nylon tie		10. Hanging hook	

Optional accessories

1. Buffer tube for bunchy fiber		3.Wall mounting kit	
2. Earthing deriving device			

To the future together.



www.ztong.com



info@ztong.com



Tel:86-0574-62498928



Ningbo Zhantong Telecom Equipment Co.,Ltd.



Fumin Industrial Zone,Moushan,Yuyao City,Zhejiang,China