


GJS-III-6013 Fiber Optical Splice Closure Specifications

Version:1.0



Official website

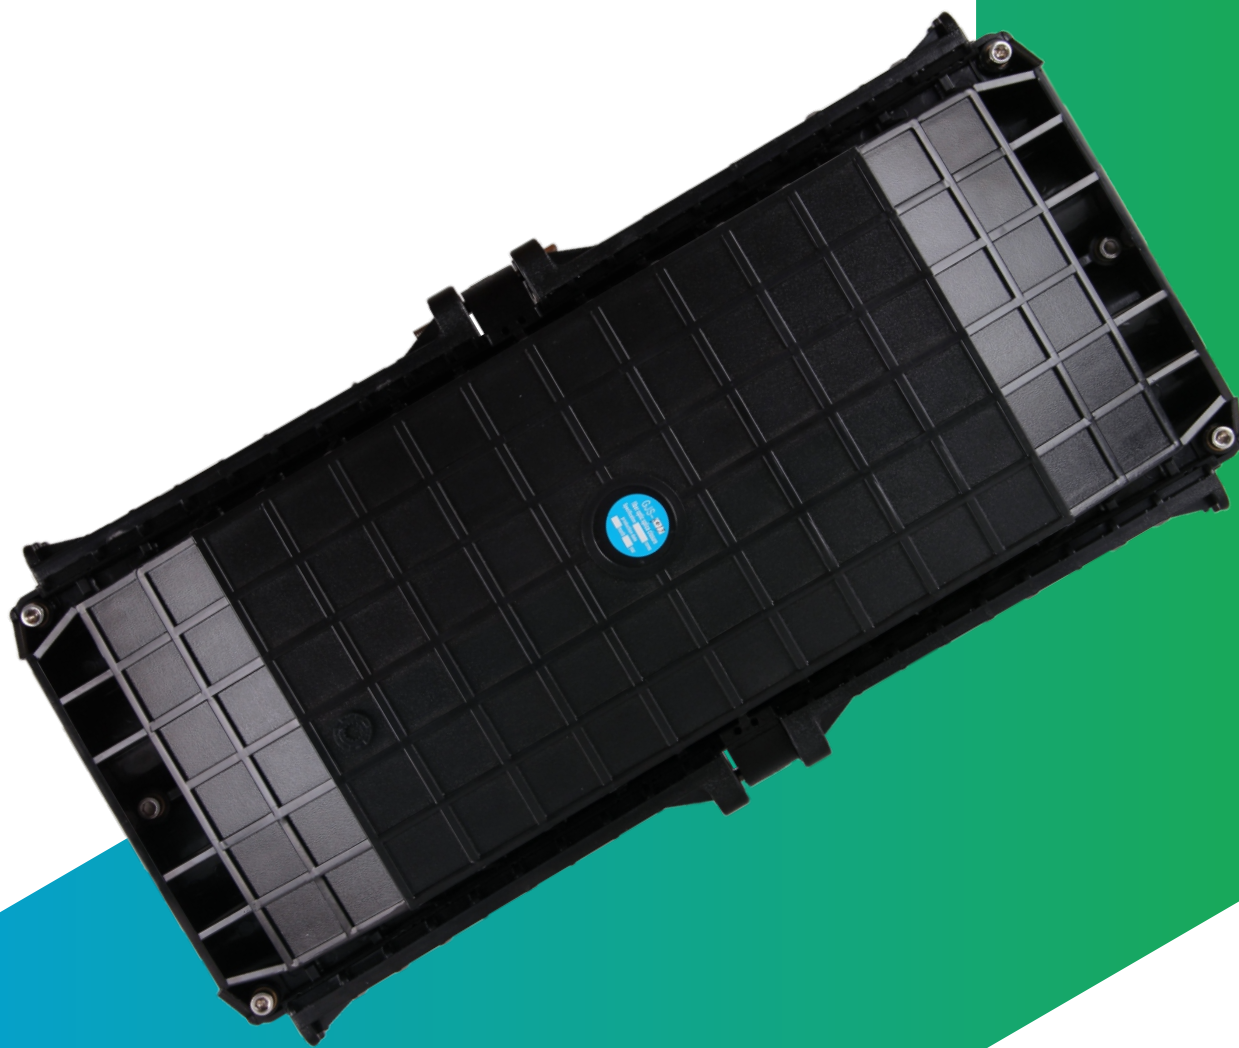

Technical specification



Installation guide



Download CN ver

GJS-III-6013 type fiber optic splice closure specifications

GJS-III-6013 Hafu-type tape sealed cable connector box, using innovative arc Hafu-type structure design, the whole with four insert plate clamping and a small number of screws fixed seal. The optical cable access holes are sealed by mechanical tape. Select the appropriate optical cable access holes according to the diameter of the optical cable access holes. Wrap the sealing tape and install it in the corresponding access holes to seal the optical cable. The main functions of this product are In the optical transmission link, it provides continuous protection for various types of optical cables without cutting through + splicing and splicing + splicing and branch joint. The shell of the product is made of modified PC engineering plastic, with good physical and chemical properties, suitable for overhead and wall hanging installation.



Reliable sealing

The upper and lower shells of the optical cable joint box are sealed with reliable elastic components, and the optical cable inlet and outlet holes are mechanically sealed by winding sealing tape, with a protection level of IP68 or above. The optical cable inlet and outlet holes of the junction box have different specifications of aperture to choose from, which can meet the sealing requirements of optical cables with different diameters. The sealing performance of the product is good.



Modular design

The welding disc adopts a fast stacking structure design, which can increase or decrease the number of welding discs according to the capacity. The bottom of the box supports fiber optic coil storage with loose sleeves, and the bending radius of the fiber optic is greater than 30mm.








Powerful Features

Support the direct connection, branching, docking, and fusion of optical cables. Can be installed overhead, wall mounted. By using grounding devices and grounding wires, support the grounding of metal components inside the junction box.

Excellent practicability

The joint box shell is made of modified PC material, and the internal metal parts are made of 304 stainless steel material, which can meet a service life of more than 25 years (depending on the environment) and has good impact and corrosion resistance characteristics. If necessary, the connector box can also be equipped with a valve for air tightness testing.

GJS-III-6013 type fiber optic splice closure specifications

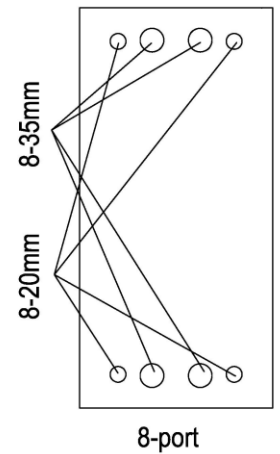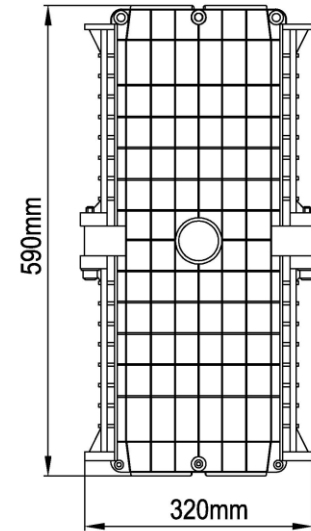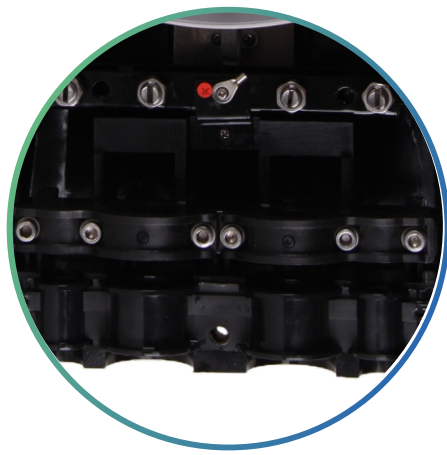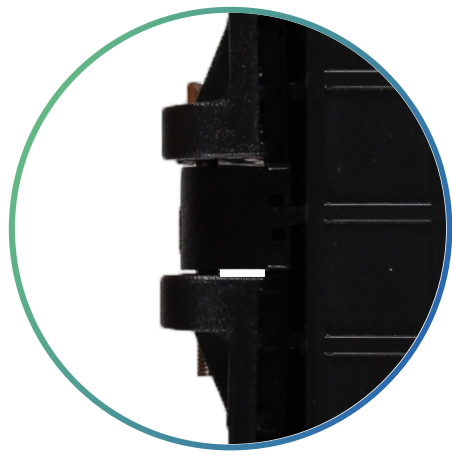

Product specifications	Splicing tray (bunchy)	Splicing tray (bunchy)	Splicing tray (ribbon)	Splicing tray (ribbon)
Maximum capacity	432 cores	648 cores	1008cores	1512cores
Capacity of each splice tray	24-48 core/tray	36-72 core/tray	144 core/tray	216 core/tray
Maximum number of splice trays	max 9 pcs	max 9 pcs	max7 pcs	max 7 pcs
Number of optical cable entrance and exit tubes	8 main cable ports			

Ordering Guide



Product number
GJS-III-6013



Product size
590*320*215mm



Product weight
9.6kg



Qty/CTN
2 set



Inner carton size
600*310*225mm



Outer carton size
610*320*470mm

Accessories information

Standard accessories

1. Labeling paper		7. Special wrench	
2. Installation tape		8. Earthing wire	
3. Abrasive cloth		9. Seal tape	
4. Heat shrinkable protective sleeve		10. Hexagon wrench and rubber hammer	
5. Nylon tie		11. Measuring paper	
6. Desiccant		12. Hanging hook	


Optional accessories

1. Pressure testing valve		4. Wall mounting kit	
2. Earthing deriving device		5. Buffer tube for ribbon fiber	
3. Buffer tube for bunchy fiber			

To the future together.

 www.ztong.com

 info@ztong.com

 Tel:86-0574-62498928

 Ningbo Zhantong Telecom Equipment Co.,Ltd.

 Fumin Industrial Zone,Moushan,Yuyao City,Zhejiang,China